

Restoration, Abatement & Remodeling Tapes



Shurtape
INDUSTRIAL

WE KNOW THE JOBSITE CAN BE RUGGED AND TOUGH. AND THAT YOUR APPROACH TO WORKING IN THESE TYPES OF ENVIRONMENTS IS EXACTING, ESPECIALLY WHEN YOU'RE FACED WITH THE NUMEROUS LEGAL, HEALTH AND SAFETY REQUIREMENTS FOR THE TASK AT HAND. YOUR TRAINING AND EXPERIENCE SPEAK VOLUMES FOR YOUR HIGH STANDARDS. SO WE THINK THE TOOLS YOU CHOOSE SHOULD DO THE SAME.

THAT'S WHY WE OFFER A FULL LINE OF TAPES THAT ARE ENGINEERED FOR PERFORMANCE, EVEN IN THE MOST CHALLENGING ENVIRONMENTS. AND WHY WE DEMAND SUCH HIGH QUALITY FROM EVERY ROLL WE CRAFT. FROM EXCELLENT ADHESION AND HOLDING POWER TO EASY HAND TEARABILITY AND CLEAN REMOVAL, OUR TAPES DELIVER THE PRODUCT FEATURES YOU CAN RELY ON TO GET THE JOB DONE QUICKLY AND EFFICIENTLY TO SAVE YOU TIME AND MONEY.



FrogTape® Double-Sided Poly-Hanging Containment Tape (DS 154)

Professional grade, double-sided poly-hanging containment tape used for creating high-performance containment systems for restoration, abatement and remodeling tasks such as painting, cleaning, sanding, mold remediation, asbestos removal and more. Offering a premium grade painter's tape adhesive on one side for 21-day clean removal from a variety of surfaces and, on the other, an aggressive adhesive that securely holds poly-sheeting and other protective coverings, DS 154 offers a one tape, one step solution to help you tackle each job with speed and ease.



CP 327



Professional grade, medium adhesion blue containment tape for use on interior and exterior walls, glass, vinyl, metal and wood, when building containment systems for restoration, remodeling, remediation and abatement jobs. Built for strength and durability, CP 327 features a synthetic rubber-based adhesive that prevents containment failure, while allowing it to remove cleanly from surfaces without damage for up to 21 days.

PC 608



PC 608 Duck Pro® by Shurtape® general purpose grade, co-extruded abatement duct tape for use when building containments and a variety of other applications in remediation, restoration and abatement jobs, including mold and asbestos removal. PC 608 combines a high-tack, high-performing cold temperature adhesive with good conformability to a variety of surfaces to deliver exceptional performance when hanging poly-sheeting.

RSW 500 T-Rex®



T-Rex® Waterproof & Repair Tape is engineered with Flex-to-Fit Technology™ to provide maximum stretch around objects and offers extreme weather performance for indoor and outdoor fixes.

PC 9 Duck Pro® by Shurtape®

Combining the brands you know with the quality and performance you trust, the Duck Pro® by Shurtape® portfolio of duct tapes includes utility and general purpose grades for applications like bundling, sealing and repairing to professional and premium grades to tackle applications that demand aggressive stick and superior hold. Our flagship PC 9 silver and colored Duck Pro® by Shurtape® contractor grade duct tapes feature aggressive adhesion, 30-day indoor clean removal and cold temperature performance to finish jobs with speed and ease.






FrogTape™ Pro Grade Flashing Tape's high-performance acrylic adhesive sticks, resticks and stays stuck to the roughest surfaces, in the toughest weather. So, you stay in control when it matters most.



FSL 55 FrogTape™



Pro grade flashing tape for creating weatherproof seals around windows and doors in residential and commercial applications.

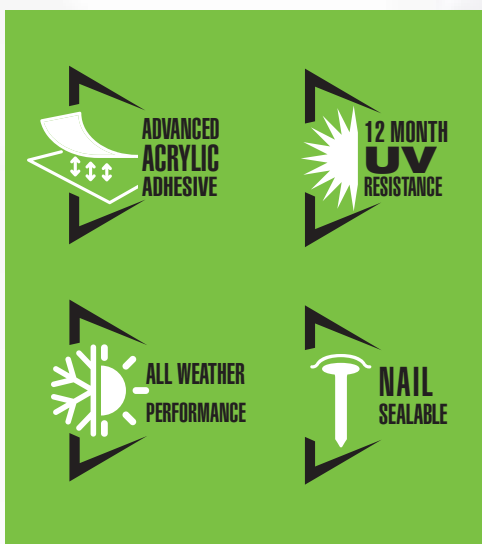

FSL 55 FrogTape™



Pro grade flashing and waterproofing tape for building transitions, deck ledgers and waterproofing above grade construction applications.

FSW 58 FrogTape™



Flashing tape for covering deck joists, stair stringers, posts and ledger boards with a layer of waterproof protection.

VP 410



UV-resistant SPVC line set tape, available in a variety of colors, used for general purpose floor, lane and aisle marking, color-coding and identification applications, as well as for insulating air ducts and underground pipes. VP 410 is engineered with a non-corrosive adhesive and flexible backing; can be used in extensive temperature, moisture and humid conditions; and meets OSHA color-coding requirements.

VP 415



SPVC film warning stripe tape used for lane marking and identification of safety zones and hazard areas. VP 415 is constructed with a flexible backing that is resistant to abrasion, UV light, acid, alkalides, oils, moisture, humidity and corrosion, and meets OSHA requirements for hazard markings.

BT 100



Non-adhesive, printed barricade tape for marking restricted areas and managing access to work sites. BT 100 features 2-inch letters that are easy to read - even from a distance, is resistant to moisture and humidity, stays pliant in the cold, and resists sagging, including when stretched over long distances. Available text includes: Lead Hazard and Wet Paint (English only); Caution and Danger (available bilingual English/Spanish).



When performance cannot be compromised, FrogTape® delivers professional results you can trust — when it matters most. The family includes CF 120/Multi-Surface (green), CF 160/Delicate Surface (yellow) and CP 130/Pro Grade (blue) formulations that feature PaintBlock® Technology, a super-absorbent polymer that seals tape edges to keep paint out and lines sharp, in addition to CP 199/Pro Grade Orange™ for production painting (does not contain PaintBlock Technology).

And now, the best just got better with CF 180/ FrogTape Advanced™ featuring PaintBlock Technology, plus advanced performance in conformability and shred-resistance.

PE 333/444/555 Polyethylene Tapes

Polyethylene film tapes used to hang poly-sheeting when building containments. A special, high-tack synthetic adhesive helps these tapes maintain a watertight seal, even in severe environments and weather conditions, but also allows them to remove cleanly to meet the rigid requirements of the job.

PE 444 and PE 555 also offer UV resistance for added versatility and durability in outdoor applications where the tape must remain true throughout prolonged sun exposure.



EV 57B



General purpose grade, 7.0 mil vinyl insulation tape for use in a variety of mechanical and electrical applications. UL Listed and CSA Approved, EV 57B is a highly conformable, lead free and flame retardant black electrical tape for use indoors and out.

EV 77B




Professional grade, 7.0 mil, all-weather vinyl insulating tape used for electrical and mechanical protection. UL Listed and CSA Approved, EV 77B is lead free, flame retardant and is engineered with a polymeric backing construction, as well as a specialized method of bonding the adhesive to the vinyl backing, which allows the tape to be highly conformable and deliver a moisture-tight seal.

AF 914CT



Lined cold temperature aluminum foil tape for joining and sealing aluminum-backed and fibrous insulation and metal ductwork, and can also be used in the industry to repair metal and sheet metal that may have been damaged by water or fire. Designed with an acrylic adhesive and tested in accordance with UL 723, AF 914CT delivers an airtight seal in temperatures ranging from -20 F to 260 F.

GS 490



Economy grade, 100 lb., fiberglass reinforced strapping tape for general purpose strapping, packaging and bundling applications. GS 490 offers good adhesion, quick stick and shock resistance for a range of tasks.

HP 200®



Production grade, 1.8 mil, hot melt packaging tape for sealing medium-weight boxes. HP 200® is engineered with an aggressive, high-tack adhesive and excellent holding power to deliver secure carton seals.

AF 984CT



UL 723 tested FSK (Foil/Scrim/Kraft) tape for sealing seams in scrim-reinforced duct insulation. Ideal for applications that demand a maximum-strength tape, AF 984CT is lined, offers an acrylic adhesive and can be used in temperatures ranging from -20 F to 260 F.

PC 745 T-Rex®



Super-tough, premium co-extruded cloth tape for extreme projects. T-Rex® Tape is designed to hold longer and stronger and tackle any job quicker and easier. Featuring an aggressive double-thick adhesive, this all-weather duct tape sticks to rough, dirty surfaces even through extreme weather conditions and temperatures.

DF 545



Professional grade, premium performance double-coated cloth tape for securing carpet and pad at convention centers, arenas and hotels, and can also be used for general purpose hanging and splicing applications.

MJ 100



Open weave fiberglass mesh tape used for seaming drywall before the application of joint compound, as well as in HVAC applications when reinforcing joints, seams and connections when paint-on mastic is used. MJ 100 drywall tape is self-adhering and offers superior strength compared to paper.

CP 105



General purpose grade, medium-high adhesion masking tape for non-critical bundling and labeling applications. CP 105 provides excellent surface contact on a range of substrates.

FP 227



High adhesion masking tape, available in a variety of colors, including high-visibility fluorecents, used for labeling and color-coding tasks on a variety of surfaces, including vinyl, metal, glass, plastic and rubber. FP 227 is flexible, unwinds easily and is resistant to abrasion and oil.

FP 97



General purpose grade flatback paper tape used for box sealing, splicing, binding, holding, tabbing, reinforcing, banding and patching applications. FP 97 is constructed with an aggressive adhesive that offers excellent holding power and a strong, flexible kraft backing.

SHURTAPE TECHNOLOGIES, LLC
PO BOX 1530
HICKORY, NC 28603-1530 USA

SHURTAPE.COM
1.888.442.TAPE
CUSTSERVICE@SHURTAPE.COM

ISO 9001-CERTIFIED QUALITY SYSTEM



SHURTAPE.COM
1.888.442.TAPE



Shurtape

TECHNOLOGIES

