

VP 410 LINE SET TAPE

TYPICAL APPLICATIONS

- For floor, lane and aisle marking, color-coding and identification applications
- Also used in the HVAC industry to wrap line sets, seam closed cell sponge insulation, and insulate air ducts and underground pipes
- Flexible for marking around objects

PRODUCT FEATURES

- General purpose grade line set tape
- UV-resistant
- Can be used in extensive temperature, moisture and humid conditions
- Available in a variety of colors
- Meets OSHA color-coding requirements

CONSTRUCTION

Backing: Clear and colored, stabilized, plasticized, soft polyvinylchloride film (SPVC)

Adhesive: Natural rubber adhesive

STANDARD WIDTHS

0.98 in; 1.96 in; 2.95 in
25 mm; 50 mm; 75 mm

STANDARD LENGTH

36 yd
33 m

Lead times may apply. Please contact Shurtape customer service for information related to stock and non-stock sizes and colors.

STANDARD CORE SIZE

3 in


APPLICABLE STANDARDS

CID A-A-1689B, Type 1, Class 2

STORAGE & USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

COLORS

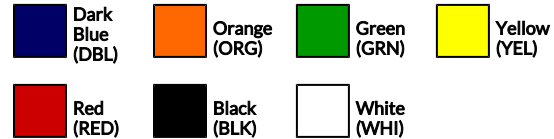

PHYSICAL PROPERTIES

	STANDARD	METRIC
Adhesion to Stainless Steel	20 oz/in width	2.19 N/10 mm
Elongation	200%	200%
Service Temperature Range	20 F to 140 F	-7 C to 60 C
Tensile	13 lbs/in width	22.8 N/10 mm
Thickness	5.25 mils	0.13 mm

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

