

Industrial
Product
Catalog

Shurtape
INDUSTRIAL

SHURTAPE INDUSTRIAL SOLUTIONS

Through our industry-leading Industrial Group, based in Hickory, NC, Shurtape is your trusted supplier of pressure sensitive tape solutions, proudly serving a variety of industrial, professional and DIY markets.

Available under market-leading brands and crafted with a spirit of passion, inspiration and innovation, our tapes and solutions are purpose-built to meet — and exceed — the standards of the markets we serve. **No matter the application, Shurtape Industrial products get the job done.**



Shurtape® brand proudly serves a variety of professional and industrial markets with a comprehensive product portfolio that includes masking and paper, foil and film, packaging, double-coated, cloth and duct, and other specialty tape products, in addition to packaging dispensers and equipment for automated and manual packaging applications.



FrogTape® offers premium-quality painting tapes that ensure professional results for any painting project. The brand's Multi-Surface, Delicate Surface and Pro Grade Blue formulations feature PaintBlock® Technology, a super-absorbent polymer that seals the edges of the tape to keep paint out and lines sharp. When performance cannot be compromised, FrogTape® delivers professional results you can trust — when it matters most.



From simple tasks to extreme fixes, T-Rex® is a family of ferociously strong tapes that pushes the boundaries of repair. It's all-weather, so you can tackle each challenge, no matter the temperature or conditions. It's quality, so you get the strength you need and long-lasting results you demand. And it's easy to use, so you can fix quickly and move on. For every fix. T-Rex can.™



We make it our business to know what contractors need. So, we know you need to save time and get the job done right, the first time. Duck Pro® offers the quality and performance you trust. With tapes that are as versatile as they are durable, we've got you covered no matter what the job demands.



Founded in New York City's Theater District in 1977, Pro Tapes offers a comprehensive range of pressure-sensitive tapes engineered for the Arts & Entertainment markets. The company has grown into a leading manufacturer of high-performance expendables, with products designed for use on stages, in studios, on sets and beyond. For nearly half a century, Pro Tapes has continued to develop specialty tapes and solutions to meet the evolving needs of the industry.

MASKING & PAPER TAPES	2	
FrogTape® Painter's Tapes	4	
Painter's Tapes	5	
General Purpose Masking Tapes	7	
Performance Masking Tapes	8	
Flatback Paper Tapes	10	
Specialty Tapes	11	
PACKAGING SOLUTIONS	12	
Hot Melt Tapes	14	
Specialty Hot Melt Tapes	15	
Printable Hot Melt Tapes	16	
Printed Hot Melt Tapes	16	
Water-Based Acrylic Tapes	17	
Water Activated Tapes	18	
Strapping Tapes	19	
Solvent-Based Acrylic Tapes	20	
Office & Specialty Tapes	21	
Recycled Series Tapes	22	
Curbside Series Tapes	22	
Tape Applicators	24	
Packaging Machines	26	
Manual Applicators	28	
CLOTH & DUCT TAPES	32	
General Purpose Duct Tapes	34	
Duck Pro® Duct Tapes	34	
Stucco Duct Tapes	36	
HVAC Duct Tapes	36	
Specialty Duct Tapes	37	
T-Rex® Tapes	38	
T-Rex® Specialty Tapes	38	
BUILDING ENVELOPE TAPES	40	
Window & Door Tapes	42	
Deck & Joist Tapes	42	
FOIL, FILM & FOAM TAPES	44	
Aluminum Foil Tapes	46	
Electrical Tapes	48	
Polyethylene/PVC Film Tapes	49	
Specialty Tapes	50	
Composite Tapes	51	
DOUBLE-COATED TAPES	52	
Double-Coated Paper Tapes	54	
Double-Coated Film Tapes	54	
Double-Coated Foam Tapes	55	
Transfer Adhesive Tapes	55	
Dispenser	55	
PRO TAPES®	56	
Pro Tapes® Tapes	58	
APPLICABLE STANDARDS	60	
WARRANTY INFORMATION	60	
PRODUCT INDEX	61	



We are proud to craft — and supply — the right tape solution for every job. And we are proud to manufacture many of those tapes right here in the USA. Look for this icon for items that are Made in the USA with Local & Global Materials.

MASKING & PAPER TAPES

We know your time is valuable.

That's why our masking and paper tapes are engineered to meet the demands of a range of jobs.

Whether you require tensile strength, temperature resistance, removability, flexibility or professional paint lines,

Shurtape delivers.



Test Before Use: Masking and paper tapes should be tested for compatibility with paints, coatings and surfaces prior to application.

FROGTAPE® PAINTER’S TAPES

CF 180
FrogTape®



MULTI-SURFACE, ADVANCED
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
THICKNESS (MILS)	4.1
ELONGATION (%)	8
APPLICABLE STANDARDS*	-

For interior or exterior use on cured painted walls, wood trim, glass and metal; including curved surfaces.



CF 120
FrogTape®



MULTI-SURFACE
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	5.3
ELONGATION (%)	10
APPLICABLE STANDARDS*	15

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal; Withstands direct sunlight for up to 7 days.



CF 160
FrogTape®



DELICATE SURFACE
LOW ADHESION
ACRYLIC-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	14
THICKNESS (MILS)	3.6
ELONGATION (%)	4.5
APPLICABLE STANDARDS*	-

For interior use on freshly painted surfaces (24 hours old), faux finishes, primed wallboard and coated wallpaper.



CP 130
FrogTape®



PRO GRADE
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
PAINTBLOCK® TECHNOLOGY

TENSILE (LBS/IN WIDTH)	22.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	5.08
ELONGATION (%)	10
APPLICABLE STANDARDS*	-

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal.



CP 199
FrogTape®



PRO GRADE ORANGE™
HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE
STICKS BETTER THAN BEIGE®

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.4
ELONGATION (%)	9
APPLICABLE STANDARDS*	-

For interior or exterior use on a variety of surfaces even in hot and humid conditions; For masking light fixtures, doorways and windows, or hanging poly for protection while spraying; Easy to apply and removes cleanly without shredding for up to 3 days.



Does not contain PaintBlock® Technology.

CP 399
FrogTape®



HIGH BOND EXTERIOR
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE
FOR SELF-CLEANING PAINT TECHNOLOGY

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
THICKNESS (MILS)	6.7
ELONGATION (%)	10
APPLICABLE STANDARDS*	-

For exterior use on surfaces such as painted wood, vinyl, aluminum, steel, brick, stucco and concrete and for keeping poly in place for spraying during paint projects; Removes cleanly without shredding on outdoor surfaces for up to 3 days.



Does not contain PaintBlock® Technology.

Test Before Use: Very high adhesion painter's tape for exterior surfaces only — test before use on all surfaces. Can cause damage if used on interior surfaces such as drywall.

The ONLY Tape With
PAINTBLOCK®
TECHNOLOGY
Seals Tape Edges! ®

Prevent Paint Bleed with
PaintBlock® Technology

FrogTape® brand painter's tapes that are treated with PaintBlock® Technology have a super-absorbent polymer that reacts with the water in latex paint to form a micro-barrier that seals the edges of the tape, preventing paint bleed and creating clean, crisp paint lines. These FrogTape® products include Advanced, Multi-Surface, Delicate Surface and Pro Grade, which are perfect for any painting project.

PAINTER’S TAPES

CP 27®



PREMIUM GRADE, SHURRELEASE®
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	22.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	5.08
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For interior and exterior use on multiple surfaces, including painted walls, glass, vinyl, metal and wood; Not recommended for use on wallpaper, unpainted wallboard, ceiling tile or with uncured coatings.



CP 150



PAINTER'S MATE GREEN®
MEDIUM ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.6
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For interior use on painted walls, woodwork, glass, metal and vinyl.



* SEE PAGE 60 FOR APPLICABLE STANDARDS

PAINTER’S TAPES

COL 00



PREMIUM GRADE, COLONIAL®
HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	15

For industrial and automotive paint applications that do not require the use of a bake oven; Can also be used for general purpose masking applications that demand a premium performance tape.



CF 33



PREMIUM GRADE
LOW-TACK
PAINT MASKING TAPE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	26
THICKNESS (MILS)	7.0
ELONGATION (%)	12
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	-

For painting, new home and remodeling applications that demand a low-tack tape; Use on tile, as well as painted drywall, trim and woodwork.



CP 66®



CONTRACTOR GRADE
HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	5.2
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For residential and commercial painting and construction, industrial masking, holding and packaging; Use in applications that demand quick stick and conformability to irregularly shaped surfaces.



CP 102



INDUSTRIAL GRADE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	17
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	33
THICKNESS (MILS)	5.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	15

For the industrial, commercial and residential paint markets for use on vinyl, metal, glass, plastic and rubber.



CP 107



INDUSTRIAL GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For non-critical painting and industrial applications that demand good adhesion, quick stick and clean removal; Also used for general purpose packaging, bundling, holding, splicing and tabbing; For use on vinyl, glass, plastic and rubber.



GENERAL PURPOSE MASKING TAPES

CP 105



GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	4.2
ELONGATION (%)	9.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For non-critical bundling and labeling applications; Also used for general purpose packaging, holding and splicing applications for home, school and industry.



CP 106



GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.7
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For packaging, bundling, holding, splicing, masking and labeling applications.



CP 83



GENERAL PURPOSE GRADE
HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
THICKNESS (MILS)	4.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For general purpose packaging, bundling, holding, splicing, tabbing and banding applications involving a variety of substrates; Not recommended for exacting industrial masking, spray painting or oven baking applications.



CP 631



GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.5
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 15

For general purpose labeling, color-coding, decorating and identification; Can also be used for packaging, bundling, binding, holding, splicing and banding applications.



* SEE PAGE 60 FOR APPLICABLE STANDARDS

PERFORMANCE MASKING TAPES

FrogTape®
225
Gold



FrogTape®
250
Light Blue



FrogTape®
325
Pink



PERFORMANCE GRADE
MODERATE TEMPERATURE
MEDIUM-HIGH ADHESION
DOES NOT CONTAIN PAINTBLOCK®
TECHNOLOGY

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	31
THICKNESS (MILS)	6.1
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	225
APPLICABLE STANDARDS*	15

For moderate temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry. (Gold - CP 225)



PERFORMANCE GRADE
MODERATE TEMPERATURE
MEDIUM-HIGH ADHESION
DOES NOT CONTAIN PAINTBLOCK®
TECHNOLOGY

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	6.4
ELONGATION (%)	-
MAXIMUM SERVICE TEMPERATURE (°F)	250
APPLICABLE STANDARDS*	15

For moderate temperature, demanding paint masking applications in the transportation (auto, coaches, buses and marine) and metal fabrication industries; Also used for wet sanding applications. (Light Blue - CP 250)



PERFORMANCE GRADE
HIGH TEMPERATURE
MEDIUM-HIGH ADHESION
DOES NOT CONTAIN PAINTBLOCK®
TECHNOLOGY

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	6.6
ELONGATION (%)	12
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	1, 15

For high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for wet sanding applications. (Pink - CP 325)



FrogTape®
FLS 325



LOW-STRETCH
PVC
FINELINE

TENSILE (LBS/IN WIDTH)	17
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	5.5
ELONGATION (%)	190
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	-

For demanding, high-temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Used when crisp fineline edges are needed.



FrogTape®
FLC 280



HIGH TEMPERATURE
PVC
FINELINE

TENSILE (LBS/IN WIDTH)	11
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	26
THICKNESS (MILS)	5.0
ELONGATION (%)	160
MAXIMUM SERVICE TEMPERATURE (°F)	280
APPLICABLE STANDARDS*	-

For demanding, high-temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Used when crisp fineline edges and compound, tight radius curves are needed.



CP 901



HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	41
THICKNESS (MILS)	6.4
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	350
APPLICABLE STANDARDS*	15

For high temperature — up to 350 F — paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Recommended for indoor use only.



FrogTape® 325 Pink

FLATBACK PAPER TAPES

FP 115



HIGH PERFORMANCE GRADE
REINFORCED FLATBACK PAPER
VERY HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	40
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	120
APPLICABLE STANDARDS*	16

For industrial splicing, start-up, tabbing, shingling and overlapping applications; Effectively secures the paper to the core during roll start-up, holds the splice during processing and anchors the end of the roll securely.



FP 202



PACKAGING PREMIUM GRADE
HEAVY DUTY, BLEACHED KRAFT PAPER
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	55
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	56
THICKNESS (MILS)	7.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	180
APPLICABLE STANDARDS*	14, 16

For splicing various substrates; Used for heavy duty hand and machine carton sealing applications; Used for general purpose applications where a thick, flatback paper tape is required.



FP 97



GENERAL PURPOSE GRADE
KRAFT FLATBACK PAPER
VERY HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	35
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	110
THICKNESS (MILS)	6.0
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16, 23, 24, 25, 26

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding, patching and floor seaming applications; FDA compliant.



FP 227



PRINTABLE
HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	57
THICKNESS (MILS)	5.8
ELONGATION (%)	2.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 16

For full-web flexographic printing equipment or hand-labeling applications.

**Fluorescent colors do not conform to ASTM D-4236



FP 96



PACKAGING GRADE
KRAFT FLATBACK PAPER
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS (MILS)	6.1
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding and patching applications.



SPECIALTY TAPES

CP 743



SPECIALTY GRADE
PHOTOGRAPHIC BLACK
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	47
THICKNESS (MILS)	6.5
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For use in photo studios, film processing labs and home darkrooms; Recommended for use as a chart tape; Used for quality photographic reproduction work, including cropping and edging negatives for contact printing; Also used for sealing camera bellows and film holders against light leaks.



CP 327



PREMIUM GRADE
MULTI-SURFACE CONTAINMENT TAPE
EXCELLENT ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.4
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For building containments in restoration, remodeling, remediation and abatement jobs; Can be used on interior and exterior walls, glass, vinyl, metal and wood.



CP 327

PACKAGING SOLUTIONS

**We understand
the challenges you face.**

That unsecure carton seals can cause problems along the supply chain, resulting in production issues, downtime and higher costs due to reworks, in addition to increasing the risk of product damage, contamination and theft caused by cartons popping open. That's why we pair our high-performance packaging tapes with innovative packaging equipment solutions to deliver packaging solutions for **the way you do business.**

Shurtape®
TRUE TO YOUR WORK™

HOT MELT TAPES

HP 100®



GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	18, 24

For manual or automated industrial carton sealing of lightweight cartons with minimal exposure to handling, shipping and load stress.



HP 200®



PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS) (MACHINE LENGTH)	1.9
THICKNESS (MILS) (HAND LENGTH)	1.8
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.



HP 300®



PERFORMANCE GRADE
35 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	25,000
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

For critical closure manual or automated industrial carton sealing of medium-weight cartons that are subjected to increased handling stress.



HP 400®



HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; Can be used in moderate to severe handling environments.



HP 500®



HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 12, 18, 24

For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.



HP 800



HEAVY DUTY GRADE
50 MICRON POLYESTER FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	54
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	95
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.4
ELONGATION (%)	130
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 10, 11, 18, 24, 27

For manual or automated industrial carton sealing of heavy duty, critical closure cartons, including military supplies, high-value electronic components and hazardous materials and chemicals.



SPECIALTY HOT MELT TAPES

HP 232®



COLD ENVIRONMENT
PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 75
SERVICE TEMPERATURE RANGE (°F)	-20 - 100
APPLICABLE STANDARDS*	7, 9

For manual or automated industrial sealing of medium-weight cartons in cold temperature environments such as food processing and packaging facilities, as well as in cold weather moving/storage and unheated warehouses.



HP 235



RECYCLED CARTONS
PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	1, 7, 9

For manual and automated industrial sealing of medium-weight, highly recycled cartons, particularly 100 percent recycled.



HP 535



RECYCLED CARTONS
HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	1, 5, 7, 9

For manual or automated industrial carton sealing of heavy, bulky, highly recycled cartons, particularly 100 percent recycled, in high stress and extreme handling conditions; Ideal for ecommerce and single parcel shipments.



FE-2* & HP 200®
* SEE PAGE 28

PRINTABLE HOT MELT TAPES

HP 260



PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual sealing of medium-weight cartons in normal manufacturing and shipping environments; May also be used in automated industrial carton sealing applications.



PRINTED HOT MELT TAPES

HP 240



PRODUCTION GRADE
STANDARD MESSAGE PRINT
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

Printed with standard messages to prevent pilferage or inform handlers of care; For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.

*Keep Refrigerated and Keep Frozen available as HP 242 cold environment packaging tape.



HP 460



HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; For use in moderate to severe handling environments.



HP 560



HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 12, 18, 24

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.



CUSTOM PRINT



30-50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
EMULSION ACRYLIC ADHESIVE

Custom-printed to prevent pilferage and allow personalization of outgoing cartons; For manual or automated industrial carton sealing of lightweight to heavy, bulky cartons in minimal to high stress and extreme handling conditions.

Available in a variety of hot melt and acrylic grades, including HP 250, HP 350, HP 450 and HP 550.

Visit Shurtape.com or contact your Shurtape Sales Representative for more details.



WATER-BASED ACRYLIC TAPES

AP 101®



GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	19
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	24

For closure of lightweight cartons in manual and automated industrial sealing settings.



AP 301®



PERFORMANCE GRADE
35 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	24

For manual and automated industrial sealing of medium-weight cartons in extreme temperature environments or subjected to handling stress.



AP 180®



PRODUCTION GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	21
THICKNESS (MILS)	1.8
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	24

For manual and automated industrial sealing of lightweight cartons.



AP 401®



HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	31
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	24

For heavy duty manual and automated industrial sealing of cartons exposed to extreme temperatures, rough handling and load stress; Also used for critical closure of bulky packages.



AP 201®



PRODUCTION GRADE
28 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	24

For manual and automated industrial sealing of light-to medium-weight cartons.



* SEE PAGE 60 FOR APPLICABLE STANDARDS

WATER ACTIVATED TAPES

GP 100



MEDIUM DUTY GRADE
NON-REINFORCED KRAFT PAPER
WATER ACTIVATED ADHESIVE

PAPER SHEET (LBS)	60
MD TENSILE (LBS/IN WIDTH)	45
CD TENSILE (LBS/IN WIDTH)	23
APPLICABLE STANDARDS*	-

For light- to medium-weight packaging applications such as inner carton sealing or palletized loads.



WP 100



ECONOMY GRADE
REINFORCED KRAFT PAPER
(MD) H110/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	55
CD TENSILE (LBS/IN WIDTH)	25
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	5/8
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing light- to medium-weight cartons up to 25 lbs with normal exposure to handling, shipping and load stress.



WP 200



PRODUCTION GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	60
CD TENSILE (LBS/IN WIDTH)	27
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	1/2
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing medium-weight cartons up to 35 lbs in normal manufacturing and shipping environments; Ideal for single parcel shipments.



WP 300



HEAVY DUTY GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	75
CD TENSILE (LBS/IN WIDTH)	30
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	2-1-1-1-1-2
MD SPACING (IN)	7/16
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	9

For critical closure of heavy-weight cartons up to 45 lbs in all environments; Ideal for single parcel shipments.



WP 400



EXTRA HEAVY DUTY GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	80
CD TENSILE (LBS/IN WIDTH)	35
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	30
MD PATTERN	2-2-1-2-2
MD SPACING (IN)	19/32
CD SPACING (IN)	0.75
APPLICABLE STANDARDS*	9

For sealing large, bulky or heavy content cartons over 50 lbs in moderate to severe handling environments; Ideal for single parcel shipments.



CUSTOM PRINT



REINFORCED OR NON-REINFORCED
KRAFT PAPER
WATER ACTIVATED ADHESIVE

For sealing lightweight to large, bulky or heavy cartons in normal to severe handling environments; Ideal for single parcel shipments; Custom printed with logo or message for delivery of goods without pilferage.

Available in a variety of grades, including GP 150, WP 150, WP 250, WP 350 and WP 450.

Visit Shurtape.com or contact your Shurtape Sales Representative for more details.



STRAPPING TAPES

GS 490



ECONOMY GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	4.5
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	24

For light duty strapping, packaging, bundling and palletizing applications.



GS 500



UTILITY GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	150
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.2
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	24

For general purpose strapping, packaging, bundling and palletizing jobs.



GS 501



INDUSTRIAL GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	175
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.4
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	24

For medium duty strapping, packaging, bundling and palletizing applications.



GS 521



HIGH PERFORMANCE GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	300
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.3
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	8, 24

For heavy duty closing, strapping, packaging, bundling, unitizing, palletizing and L-Clip applications.



PS 748



UTILITY GRADE
TENSILIZED, MOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	2.8
ELONGATION (%)	30
SERVICE TEMPERATURE RANGE (°F)	0 - 250
APPLICABLE STANDARDS*	-

For light duty strapping, packaging, bundling and palletizing applications.



* SEE PAGE 60 FOR APPLICABLE STANDARDS

SOLVENT-BASED ACRYLIC TAPES

PP 802



PREMIUM PLUS GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.0
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	18

For light to medium duty sealing, repairing and bundling of corrugated cartons, paper and film containers; Use with a hand-held or machine dispenser.

PP 810



PREMIUM GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	1.8
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	18

For sealing light- to medium-weight cartons in everyday shipping and handling environments; Also used for bundling and securing loose objects; Can also be used to repair corrugated cartons, paper and film containers; Use with a hand-held dispenser.

PP 815



HEAVY DUTY GRADE
40 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	2.6
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	18

For critical sealing and repairing of corrugated containers in hot and cold environments; Use with a hand-held dispenser.

OFFICE & SPECIALTY TAPES

VF 719



ECONOMY GRADE
UPVC FILM
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	13
THICKNESS (MILS)	1.9
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	20

For use with a hand dispenser to seal cartons with recycled fiber content, heavy ink coverage or rough surfaces.

AP 15



SHIPPING GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	19
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	24

For protecting shipping labels and other printed surfaces against weather and handling.



PP 808



GENERAL PURPOSE GRADE
UPVC FILM
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	2.1
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	-

For lightweight bag sealing, banding, bundling and packaging applications; Also used for color-coding tasks.



CT 109



GENERAL PURPOSE GRADE
CELLULOSE FILM
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	1.7
ELONGATION (%)	18
MAXIMUM SERVICE TEMPERATURE (°F)	265
APPLICABLE STANDARDS*	6

For use with a hand dispenser to seal cartons with recycled fiber content, heavy ink coverage or rough surfaces.



SD 935* & PP Series
* SEE PAGE 30

* SEE PAGE 60 FOR APPLICABLE STANDARDS

RECYCLED SERIES TAPES

rAP 201



PRODUCTION GRADE
19 MICRON 90% POST-CONSUMER
RECYCLED rPET FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
HOLDING POWER TO FIBERBOARD (MINUTES)	-
THICKNESS (MILS)	1.3
ELONGATION (%)	135
APPLICATION TEMPERATURE RANGE (°F)	20 - 100
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	9

For manual or automated industrial carton sealing of medium weight-cartons.



rHP 100



GENERAL PURPOSE GRADE
19 MICRON 90% POST-CONSUMER
RECYCLED rPET FILM, SYNTHETIC RUBBER/
RESIN HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	53
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.3
ELONGATION (%)	125
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	9

For manual or automated industrial carton sealing of lightweight cartons with minimal exposure to handling, shipping and load stress.



rHP 235



RECYCLED CARTONS PRODUCTION GRADE
23 MICRON 90% POST-CONSUMER
RECYCLED rPET FILM, SYNTHETIC RUBBER/
RESIN HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	63
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.75
ELONGATION (%)	135
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	1, 7, 9

For manual and automated industrial sealing of medium-weight, highly recycled cartons, particularly 100 percent recycled.



rHP 235

rHP 255



CUSTOM-PRINTED
RECYCLED CARTONS PRODUCTION GRADE
23 MICRON 90% POST-CONSUMER
RECYCLED rPET FILM, SYNTHETIC RUBBER/
RESIN HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	63
THICKNESS (MILS)	1.75
ELONGATION (%)	135
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 18, 24

For manual and automated industrial sealing of medium-weight, highly recycled cartons, particularly 100 percent recycled; Custom-printed with logo or message for delivery of goods without pilferage.



CR 100



PRODUCTION GRADE
SATURATED CREPE PAPER
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	51.5
THICKNESS (MILS)	4.3
ELONGATION (%)	-
APPLICATION TEMPERATURE RANGE (°F)	-
SERVICE TEMPERATURE RANGE (°F)	150
APPLICABLE STANDARDS*	9, 15

For manual industrial sealing of light and non-critical cartons that demand a sustainable, curbside recyclable solution.

*Curbside recyclable on the box using standard application methods.



CR 400



PERFORMANCE GRADE
EXTENSIBLE, KRAFT, FLATBACK PAPER
SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	35
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	110
THICKNESS (MILS)	6.0
ELONGATION (%)	6
APPLICATION TEMPERATURE RANGE (°F)	-
SERVICE TEMPERATURE RANGE (°F)	60 - 150
APPLICABLE STANDARDS*	9, 15

For use in manual and automated carton sealing applications that demand a sustainable, curbside recyclable solution with excellent quick stick and holding power; Meets FDA specifications for indirect food contact.

*Curbside recyclable on the box using standard application methods.



CR 400

TAPE APPLICATORS

SHURSEAL®



EASY TO RETROFIT
Seamless integration with case
erectors and sealers



**MULTIPLE WIPE-DOWN
POINTS**
Full use of the tape's adhesive



**KNIFELESS OPENING
CASE SEALS**
With Folded Edge®
Technology



OPEN DESIGN
Easy tape threading



RIGHTSIZE TAPE LENGTH
Reduce tape use while
maintaining secure seals

Purpose-Built for Secure Seals, Every Time™.

The ShurSEAL® Packaging Solution is an automated case sealing system that combines high-performance Shurtape® packaging tape with innovative tape application technology. Designed to reduce material waste, downtime and maintenance costs, while increasing safety and content security, ShurSEAL delivers consistent and secure seals, carton after carton — to keep you running at peak production.



TAPE APPLICATORS

7000 SERIES

7000 Series Tape Applicators feature:

- Easy retrofit into existing erectors and sealers
- Stainless steel wash-down ready construction
- Open design for easy threading
- Front and rear tape tab adjustments
- Good to the Core® tape for less material waste
- Consistent seals at speeds up to 200 fpm
- Multiple wipe-down points for full use of the tape's adhesive
- Available with PrimeAlert™ Tape Monitoring System
- Folded Edge® Technology also available



8000 SERIES (QUICK CHANGE)

8000 Series Quick Change Sealing System is uniquely engineered to tackle the downtime associated with slow tape roll changeovers, while offering all the benefits of the 7000 Series Applicators:

- Tape roll changes in less than 10 seconds
- Interchangeable inserts allow for easy offline threading
- Lightweight inserts reduce operator strain and lifting
- Retrofits to existing erectors and sealers
- Available with PrimeAlert™ Tape Monitoring System
- Folded Edge® Technology also available



Sustainability

Reducing Tape Waste with The ShurSEAL® Solution.

Material waste is a common problem in manufacturing lines, with tape being a main contributor. From partially used “stub rolls” littered throughout factory floors to too much tape being applied to boxes, we observed end-of-line packaging inefficiencies first-hand and knew it was time to challenge the norm.

Designed to make a difference, The ShurSEAL Solution delivers consistent tape tab lengths on the sides of the box along with excellent wipe-down force to ensure full utilization of the tape's adhesive while minimizing waste. All while using Shurtape's high-performance packaging tape with Good to the Core® technology to maximize consumption of the entire roll.

In other words, The ShurSEAL Solution allows you to put less tape on the box and reduce material waste while delivering **Secure Seals, Every Time.™**

* SEE PAGE 60 FOR APPLICABLE STANDARDS

PACKAGING MACHINES

CASE ERECTORS



FLUID FORM™ CONTROLS
Automated LxWxD robot path generation



ACTIVE CASE SQUARING
Dynamic alignment for uniform square cases



DURABLE, SANITARY FRAME DESIGN
Robust, reliable and hygienic



Shurtape ET 20U



SAFE AND ERGONOMIC
Operator-friendly



ROBOTIC PICK AND PASS
Simplified case motion



OPPOSING-CUP CASE OPENING
Reliable rack-open

Automated uniform case erectors for forming cartons and cases. Offering minimum complexity for maximum output and effortless set-up with intuitive Fluid Form™ Controls, these case erectors deliver quick and trouble-free changeovers, consistently square cases, fewer wear parts and less maintenance — for maximum operational efficiencies in your end-of-line packaging operations.

- Shurtape Case Erectors offer:**
- 40-50% fewer parts than competing machines.
 - Dependable opposing-cup case opening.
 - Active case squaring for square cases, every time.
 - Secure Seals, Every Time.™
 - Models available with both taping and glue capabilities; functions cannot be operated simultaneously.

PACKAGING MACHINES

CASE SEALERS



TOUCH-SCREEN CONTROLS
With carton recipe memory



ANSI / PMMI COMPLIANT GUARDING
Operator-friendly access and safety



OPTIONAL CASTERS
For portability and dexterity




Shurtape ST 30U



MAJOR FLAP CONTROL
Positive flap engagement for reduced jams



OPTIONAL TOP CAVITY LIFT
Easy access to bottom tape applicator



SPRING LOADED, SOFT GRIP BELTS
Consistent and reliable case transport

Automated uniform case sealers capable of handling a large variety of case sizes and configurations. These case sealers are safe, simple, accessible and packed with functionality, including major flap management for reduced case jams and spring-loaded, soft-grip side belts for reliable case transport — because you have no time for downtime.

- Shurtape Case Sealers offer:**
- Standard 'Smart' sealer controls for easy line integration and command.
 - Active major flap management for less downtime and higher efficiency.
 - Spring-loaded side belts for consistent case engagement.
 - Secure Seals, Every Time.™
 - Models available with both taping and glue capabilities; functions cannot be operated simultaneously.

* SEE PAGE 60 FOR APPLICABLE STANDARDS

MANUAL APPLICATORS

FOLDED EDGE®
HAND DISPENSERS

Folded Edge Hand Dispensers feature:

- Improved wipe-down force for tamper-evident seals
- Retractable/pivoting safety blade
- Visible tape length indicators for tab length control
- Visible markers for single-strip, straight taping guidance
- Durable, heavy duty design for long-lasting performance
- Available in 2in (FE-2) and 3in (FE-3) models



Why Go Knifeless?

Benefits to People and Product in Packaging Operations


People

- **Reduce the Risk of Injury**
On average, a laceration to an employee's hand can cost upwards of \$92,000* in terms of costs and lost labor. Folded Edge® Technology creates a no-knife-to-open carton seal.
- **No Knife from Seal to Opening**
Folded Edge Technology ensures both the users of your end-of-line packaging equipment and the recipient of your package stay safe by eliminating knives.

*<https://www.osha.gov/safetypays/estimator>

Product & Operations

- **25% More Strength Required to Break Tape**
Doubling the thickness of the edge of tape along the length of the box increases seal strength and reduces the risk of the edges being nicked or broken.
- **Prevent Damage, Contamination and Theft**
Enhanced seal strength by folding the edges of the tape, along with unmatched wipe-down force via the tape applicator to deliver full utilization of the tape's adhesive, provide an added layer of security to keep contents secure from costly damage, contamination and theft.

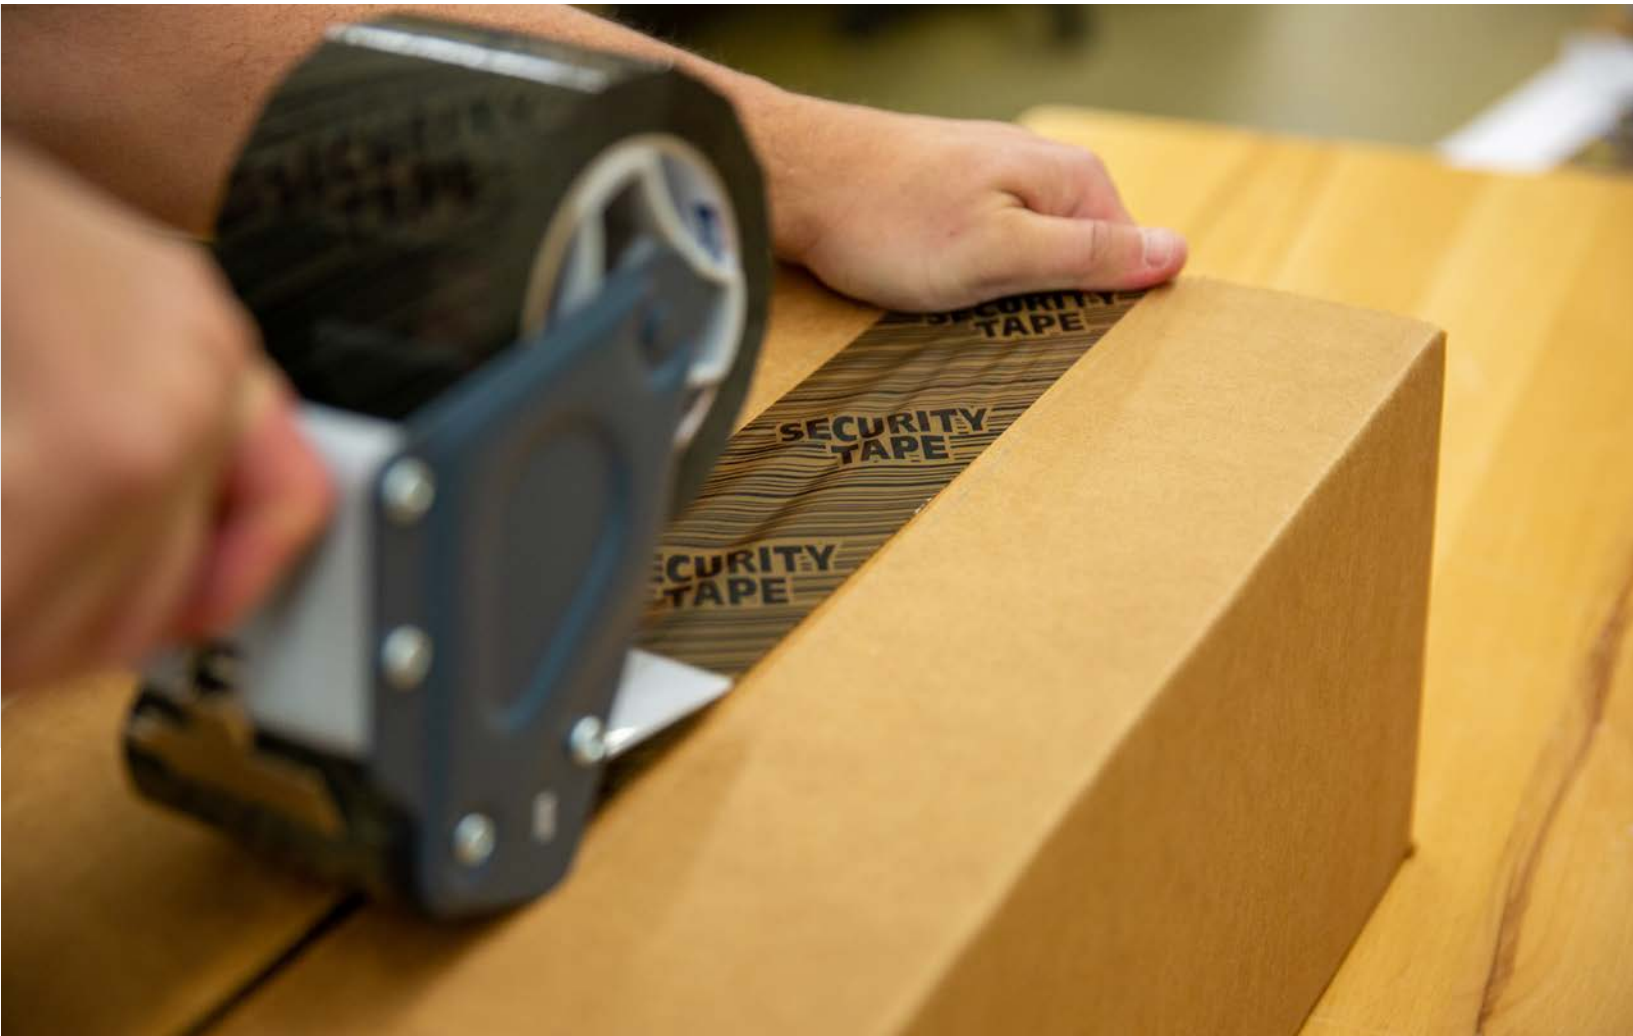

MANUAL APPLICATORS



FT Series & GS Series*
* SEE PAGE 19

FT Series



PATENTED PISTOL-GRIP
FILAMENT TAPE DISPENSER
36 & 72-MM WIDTH USE

For manual packaging, L-Clipping, C-Clipping,
strapping, bundling and palletizing applications.

RECOMMENDED PRODUCTS
GS Series

SD 932



STANDARD GRADE
PISTOL-GRIP TAPE DISPENSER
WITH ANTI-REVERSE BAR
2-IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202,
VF 719

SD 934



PROFESSIONAL GRADE
PISTOL-GRIP TAPE DISPENSER
HIGH-IMPACT HANDLE, METAL FRAME
2-IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202,
VF 719

SD 935



PROFESSIONAL GRADE
PISTOL-GRIP TAPE DISPENSER
HIGH-IMPACT HANDLE, METAL FRAME
3-IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202,
VF 719

SD 936



DELUXE SILENCER
PISTOL-GRIP TAPE DISPENSER
HIGH-IMPACT HANDLE, METAL FRAME
2-IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202,
VF 719

MANUAL APPLICATORS

SD 999



FILAMENT TAPE DISPENSER
METAL-FRAMED
1-IN WIDTH USE

For manual closing, strapping, packaging, bundling
and palletizing applications.

RECOMMENDED PRODUCTS
GS Series, PS Series

SD 930



ECONOMY GRADE
CLAMSHELL TAPE DISPENSER
HIGH-IMPACT PLASTIC
2-IN WIDTH USE

For manual packaging applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202,
VF 719

SD 931



LABEL PROTECTION DISPENSER
HIGH-IMPACT PLASTIC
4-IN WIDTH USE

For use on packing lists, sales slips and labels.

RECOMMENDED PRODUCTS
AP 15, PP 807



SD 937 & PP 808*
* SEE PAGE 21

SD 937



BAG-SEALING DISPENSER
METAL-FRAMED
9-MM WIDTH USE

For single-stroke bag sealing applications.

RECOMMENDED PRODUCTS
PP 808

SD 955



DESKTOP TAPE DISPENSER
HIGH-IMPACT PLASTIC
1-IN WIDTH USE

For mending and light duty splicing tasks. Use with
tapes with a 1-in or 3-in inside diameter core.

E-1



ELECTRONIC GUMMED TAPE DISPENSER
RUGGED CONSTRUCTION
ONE-TOUCH PRESET LENGTHS
1.5 TO 3-IN WIDTH USE

Used to feed, moisten and cut water activated tape to
desired measurement in case sealing applications.

RECOMMENDED PRODUCTS
WP Series

M-1



MANUAL GUMMED TAPE DISPENSER
STEEL CONSTRUCTION
BAKED ENAMEL FINISH
1.5 TO 3-IN WIDTH USE

Used to feed, moisten and cut water activated tape to
desired measurement in case sealing applications.

RECOMMENDED PRODUCTS
WP Series

*Shurtape® is an authorized distributor of Phoenix® gummed tape dispensers



CLOTH & DUCT TAPES

We know all jobs have one thing in common: they must be done right. That's why our complete line of cloth and duct tapes is engineered to exacting specs. When easy handling, varying adhesion levels and durable construction characteristics are needed, trust Shurtape to give every job a distinctive mark of **excellence**.

Shurtape®
TRUE TO YOUR WORK™

DUCK PRO
BRAND DUCT TAPE

T-REX™
FEROCIOUSLY STRONG TAPE®

GENERAL PURPOSE DUCT TAPES

PC 6



ECONOMY
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
NOMINAL THICKNESS (MILS)	6.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, repairing, holding and waterproofing; Also used in the remediation/abatement industry as a gooseneck tape.



PC 7



UTILITY GRADE
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
NOMINAL THICKNESS (MILS)	7.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42

For utility grade sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; For temporary or permanent use.



PC 8



GENERAL PURPOSE
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
NOMINAL THICKNESS (MILS)	8.0
ELONGATION (%)	21
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42

For general purpose sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



DUCK PRO® DUCT TAPES

Duck Pro® PC 9



GENERAL PURPOSE
CONTRACTOR GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	5, 42

For permanent or temporary general purpose use in bundling, sealing, repairing and holding applications, as well as color coding, color matching and labeling; Features 30-day clean removal.



Duck Pro® PC 619



GENERAL PURPOSE
SPECIALTY GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	5

For general use, including color-coding, labeling, floor marking and book-binding; Also used for stage preparation in the motion picture and audio/visual industries; Can also be used for a variety of applications in the hospitality, motorsports and floral industries.



Duck Pro® PC 9

DUCK PRO® DUCT TAPES

Duck Pro® PC 618



PROFESSIONAL
INDUSTRIAL COLORED CLOTH
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	69
NOMINAL THICKNESS (MILS)	9.5
ELONGATION (%)	22
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	32, 42

For color-coding, holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications. Can also be used as a condensation barrier in appliance assemblies.



Duck Pro® PC 721



PROFESSIONAL
ALL-PURPOSE GRADE
EXCELLENT CONFORMABILITY
AND HOLDING POWER
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	79
NOMINAL THICKNESS (MILS)	11.0
ELONGATION (%)	21.5
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	42

Extreme hold cloth duct tape for HVAC applications to hold, seal and seam sheet metal, as well as for heavy duty industrial applications like holding, bundling, splicing, protecting and packaging. PC 721 is designed for demanding applications that require excellent conformability, tack and holding power, and its co-extruded construction means it will not delaminate.



Duck Pro® PC 609



PROFESSIONAL
EXCELLENT HOLD
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
NOMINAL THICKNESS (MILS)	10.0
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	42

For use in the HVAC industry to repair thermal insulation and seal metal ductwork; Used in the manufactured housing industry to seam bottom boards and for patching, seaming and sealing; Used for packaging, bundling, holding, wrapping and waterproofing; Also used for asbestos and mold remediation.



Duck Pro® PC 657®



PROFESSIONAL
HEAVY DUTY GRADE
EXCELLENT HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	115
NOMINAL THICKNESS (MILS)	13
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42

For use in high performance motorsports applications, pre-manufactured housing and RV assembly, critical industrial applications and for protection during sandblasting and metal-peening operations.



For ultimate performance, choose Shurtape duct tapes with Polybonded CO-EX Technology®. The co-extrusion process melds polyethylene, cloth and adhesive in a single, high temperature step, resulting in a permanent, airtight bond. This seamless construction creates added strength and will not delaminate.

* SEE PAGE 60 FOR APPLICABLE STANDARDS

STUCCO DUCT TAPES

PC 622



PREMIUM GRADE, CLOTH DUCT
CONFORMABLE WITH EXCELLENT HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	51
NOMINAL THICKNESS (MILS)	12.5
ELONGATION (%)	11
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	42

For protecting window and door frames during stucco applications; Used in high performance motorsports; For heavy duty bundling, holding and splicing.



PC 667



SPECIALTY GRADE, CLOTH DUCT
EASY TO TEAR
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	40
NOMINAL THICKNESS (MILS)	9.0
ELONGATION (%)	22
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For protective masking of non-painted surfaces, including steel, vinyl, aluminum and anodized metals; Use in plastering, stucco, concrete, pool and tile applications.



HVAC DUCT TAPES

PC 857



UL PRINTED COATED CLOTH
HIGH STRENGTH AND HOLD
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
NOMINAL THICKNESS (MILS)	14.0
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	33, 41, 42, 43

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct.



SF 682



SHURFLEX® PROFESSIONAL GRADE
FLEXIBLE AND CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	42

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, rigid ductboards, air vents, insulation, fibrous filter banks and pollution collection systems.



MJ 100



PROFESSIONAL GRADE
FIBERGLASS MESH
WATER-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	75.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	8
THICKNESS (MILS)	9.0
ELONGATION (%)	3.83
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

For reinforcing joints, seams and connections when paint-on mastic is used in HVAC applications; Can also be applied to drywall seams before the application of joint compound.

SPECIALTY DUCT TAPES

PC 624



NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
NOMINAL THICKNESS (MILS)	13.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 37

For a more robust variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



PC 625



MILITARY SPEC LUSTERLESS
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
ASTM D5486M TESTED

TENSILE (LBS/IN WIDTH)	41
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
NOMINAL THICKNESS (MILS)	12.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	13, 45

For use as a premium, waterproof packaging tape that meets government specifications; Can also be used for moisture-proofing cartons, canisters and tubing.



DF 545



PROFESSIONAL
PREMIUM DOUBLE-COATED CLOTH
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (^LS)	64
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (^ES)	52
NOMINAL THICKNESS WITHOUT LINER (MILS)	10.5
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	5

For securing carpet and pad at convention centers, arenas and hotels; Also used for general purpose hanging applications in the construction and abatement industries; Can also be used for splicing applications; Features 30-day indoor clean removal. ^LS=LINER SIDE; ^ES=EXPOSED SIDE



SF 682

T-REX® TAPES



T-Rex® Duct Tape

SUPER-TOUGH, ALL-WEATHER
QUICK STICK
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	47
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	105
THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

Super-tough, premium co-extruded cloth tape for extreme projects. (Duct Tape - PC 745)



T-Rex® Brute Force®

SUPER-TOUGH, ALL-WEATHER
NATURAL RUBBER ADHESIVE
HOLD MORE, DO MORE™

TENSILE (LBS/IN WIDTH)	250
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	17.0
ELONGATION (%)	21
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

Super-tough, premium co-extruded cloth tape for the most extreme projects. (Brute Force - PC 945)



T-Rex® Extreme Strength Waterproof & Repair Tape

EXTREME, ALL-WEATHER
HIGH-TACK
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	320
THICKNESS WITHOUT LINER (MILS)	30.0
ELONGATION (%)	>700
APPLICATION TEMPERATURE RANGE (°F)	-
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

Engineered with an extra thick rubberized butyl adhesive, this tape provides heavy duty, waterproof adhesion in a wide range of repairs and conditions, even under water.



T-Rex® Ferociously Strong Waterproof & Repair Tape

T-REX® SPECIALTY TAPES



T-Rex® Ferociously Strong Waterproof & Repair Tape

WITH FLEX-TO-FIT TECHNOLOGY™
MAXIMUM STRETCH, FIERCE GRIP
ALL-WEATHER

TENSILE (LBS/IN WIDTH)	>9
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	>24
THICKNESS (MILS)	10.0
ELONGATION (%)	700
SERVICE TEMPERATURE RANGE (°F)	-40 - 240
APPLICABLE STANDARDS*	42, 46

Formulated with Flex-to-Fit Technology™, this fix-it-all tape outperforms duct tape in multiple applications and is a reliable solution for challenging repairs.



T-Rex® Clear Repair Tape

HAND-TEARABLE
ALL-WEATHER
SOLVENT ACRYLIC-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	23.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
HOLDING POWER TO STEEL (MINUTES)	1,800+
THICKNESS (MILS)	6.8
ELONGATION (%)	430.0
SERVICE TEMPERATURE RANGE (°F)	-5 - 150
APPLICABLE STANDARDS*	-

Repair tape designed with a crystal-clear construction for discreet adhesion over a wide range of repairs. (Clear Repair Tape - RT 700)



*Follow recommended usage instructions for best results in wet-stick applications.



T-Rex® Double-Sided Super Glue Tape

PERMANENT, ALL-WEATHER
HIGH-TACK, HAND-TEARABLE
AGGRESSIVE ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	-
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS WITHOUT LINER (MILS)	7.0
ELONGATION (%)	NA
APPLICATION TEMPERATURE RANGE (°F)	50 - 100
SERVICE TEMPERATURE RANGE (°F)	0 - 175
APPLICABLE STANDARDS*	-

High-tack double-sided super glue-like tape for mounting, automotive and surface-to-surface repairs.



T-Rex® Duct Tape

BUILDING ENVELOPE TAPES

We know nothing stops you.

That's why we offer a variety of tapes to meet the needs of challenging building envelope applications. Constructed with a high-strength film backing and high-performance acrylic adhesive, only FrogTape Flashing Tapes stick, restick and stay stuck in the toughest conditions to help you **stay in control.**



WINDOW & DOOR TAPES

FrogTape™
Pro Grade
Flashing Tape



FrogTape™
Pro Grade
Flashing and
Waterproofing
Tape



ADVANCED ACRYLIC ADHESIVE
12-MONTH UV RESISTANCE
ALL-WEATHER PERFORMANCE

ADHESION TO OSB (LBS/IN WIDTH):	>1.5
ADHESION TO PLYWOOD (LBS/IN WIDTH):	>1.5
ADHESION TO RIGID PVC (LBS/IN WIDTH):	>1.5
ADHESION TO GLASS FACED GYPSUM (LBS/IN WIDTH):	>1.5
APPLICATION TEMPERATURE RANGE (°F)	0 - 150
SERVICE TEMPERATURE RANGE (°F)	-40 - 240
APPLICABLE STANDARDS*	46

Flashing tape for creating weatherproof seals around windows and doors in residential and commercial applications. (Pro Grade Flashing Tape - FSL 055)



ADVANCED ACRYLIC ADHESIVE
12-MONTH UV RESISTANCE
ALL-WEATHER PERFORMANCE

ADHESION TO OSB (LBS/IN WIDTH):	>1.5
ADHESION TO PLYWOOD (LBS/IN WIDTH):	>1.5
ADHESION TO RIGID PVC (LBS/IN WIDTH):	>1.5
ADHESION TO GLASS FACED GYPSUM (LBS/IN WIDTH):	>1.5
APPLICATION TEMP RANGE:	0 - 150
SERVICE TEMP RANGE:	-40 - 240
APPLICABLE STANDARDS*	46

Flashing tape for building transitions, deck ledgers and waterproofing above grade construction applications. (Pro Grade Flashing and Waterproofing Tape - FSL 055)



DECK & JOIST TAPES

FrogTape™
Pro Grade
Deck and Joist
Flashing Tape



ADVANCED ACRYLIC ADHESIVE
12-MONTH UV RESISTANCE
ALL-WEATHER PERFORMANCE

ADHESION TO OSB (LBS/IN WIDTH):	>1.5
ADHESION TO PLYWOOD (LBS/IN WIDTH):	>1.5
ADHESION TO RIGID PVC (LBS/IN WIDTH):	>1.5
ADHESION TO GLASS FACED GYPSUM (LBS/IN WIDTH):	>1.5
APPLICATION TEMP RANGE:	0 - 150
SERVICE TEMP RANGE:	-40 - 240
APPLICABLE STANDARDS*	46

Flashing tape for covering deck joists, stair stringers, posts and ledger boards with a layer of waterproof protection. (Pro Grade Deck and Joist Flashing Tape - FSW 058)



ShurGRIP™ Advanced
Acrylic Adhesive

Only FrogTape Pro Grade Flashing Tapes are engineered with a high-performance, UV-cured acrylic adhesive. This unique adhesive construction makes the tape initially repositionable for precise, hassle-free installation, compatible with a variety of building materials and substrates, as well as durable to withstand extreme temperatures and weather conditions.



FrogTape™ Pro Grade
Flashing Tape

FOIL, FILM & FOAM TAPES

**We know your reputation
is on the line.**

That's why we offer a comprehensive assortment of foil, film and foam tapes that are engineered for performance in a range of jobs, from HVAC and insulation to electrical, safety marking and more. With options that meet the code, perform in the cold and deliver superior results, Shurtape has you covered with the tapes you need to ensure your work exceeds your **exacting standards.**

Shurtape®
TRUE TO YOUR WORK™

ALUMINUM FOIL TAPES

AF 099



2-MIL DEAD-SOFT ALUMINUM FOIL
FLEXIBLE AND EASY TO USE
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.1
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	35, 40, 41, 42, 43

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct; Used when repairing metal and sheet metal; Temporary fixes/repairs for outdoor electrical boxes; Sheet metal ventilation fan exhaust ductwork and dryer vents; Bath fan installs and replacements.



AF 914CT



1.5-MIL ALUMINUM FOIL
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	18.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS WITHOUT LINER (MILS)	3.4
ELONGATION (%)	2
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	28, 42

For joining and sealing aluminum-backed and fibrous insulation and metal ductwork in temperatures ranging from -20 F to 260 F; Also used to repair metal and sheet metal.



AF 975CT



2-MIL ALUMINUM FOIL
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	4.0
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	28, 42

For use in temperatures ranging from -20 F to 260 F when joining and sealing aluminum-backed or fibrous insulation and metal ductwork; Can also be used when repairing metal and sheet metal.



ALUMINUM FOIL TAPES

SF 685



PRINTED SHURMASTIC® FOIL
FORMS A PERMANENT BOND
BUTYL RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	255
THICKNESS (MILS)	17.0
ELONGATION (%)	560.0
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	34, 38, 39, 42

For indoor or outdoor use to seal Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



SF 686



UL PRINTED SHURMASTIC® FOIL
INSTANT, WATER-RESISTANT GRIP
BUTYL RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	23.8
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	111
THICKNESS (MILS)	17.0
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	31, 38, 39, 41, 42, 43

For airtight and moisture-free sealing of Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



DC 181



UL PRINTED BOPP FILM
EXCELLENT CONFORMABILITY
ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	2.7
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	-10 - 210
APPLICABLE STANDARDS*	35, 41, 42, 43

For use on Class 1 Flex Duct for connecting, joining, sealing and patching flexible air ductwork.



AF 099

ELECTRICAL TAPES

EV 57B



GENERAL PURPOSE GRADE
UL LISTED ELECTRICAL
CONFORMABLE AND HAND-TEARABLE
PVC FILM

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	22, 43

For primary insulation of electrical splices up to 600 V; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



EV 77B



PROFESSIONAL GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	22, 43

For primary insulation of electrical splices up to 600 V; Also used as a jacketing on high voltage splices and repairs; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



EV 57C



GENERAL PURPOSE GRADE
UL LISTED ELECTRICAL
CONFORMABLE AND HAND-TEARABLE
PVC FILM

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	22, 43

For color-coding and phasing in electrical applications; Can also be used as primary insulation of electrical splices up to 600 V; Can be used when wrapping wire harnesses and cables; For indoor and outdoor use.



EV 77C



PROFESSIONAL GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	22, 43

For color-coding and identifying phases, circuits, feeders and branches; Also used for primary insulation of electrical splices up to 600 V; Can be used for marking container contents, piping and conduit systems, and as a warning tape; For indoor and outdoor use.



POLYETHYLENE/PVC FILM TAPES

BT 100



GENERAL PURPOSE BARRICADE
2-IN LETTERS ARE EASY TO READ
RESISTS SAGGING
ADHESIVE-FREE

THICKNESS (MILS)	2.0 - 3.0
APPLICABLE STANDARDS*	-

For marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries.

*Lead Hazard and Wet Paint (English only); Caution and Danger (available bilingual English/Spanish).

VP 410




GENERAL PURPOSE GRADE
LINE SET
SPVC FILM

TENSILE (LBS/IN WIDTH)	13
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	5.25
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	20 - 140
APPLICABLE STANDARDS*	19

For floor, lane and aisle marking, color-coding and identification applications; Also used in the HVAC industry to wrap line sets, seam closed cell sponge insulation, and insulate air ducts and underground pipes; Flexible for marking around objects; Meets OSHA color-coding requirements.



VP 415

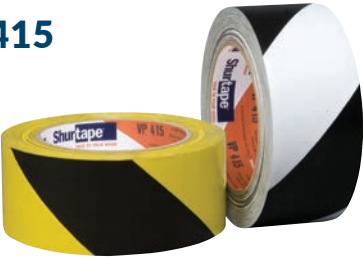

GENERAL PURPOSE GRADE
WARNING STRIPE
SPVC FILM

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	12
THICKNESS (MILS)	6.6
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	20 - 140
APPLICABLE STANDARDS*	19

For lane marking and identification of safety zones and hazard areas; Resistant to abrasion, UV light, acid, alkalides, oils, moisture, humidity and corrosion; Flexible for marking around objects; Meets OSHA requirements for hazard markings.



PW 100



GENERAL PURPOSE GRADE
PVC PIPE WRAP
CORROSION/MOISTURE RESISTANT
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	10.0
ELONGATION (%)	200
APPLICATION TEMPERATURE RANGE (°F)	14 - 176
SERVICE TEMPERATURE RANGE (°F)	32 - 104
APPLICABLE STANDARDS*	-

For corrosion protection of under and above ground metal and plastic pipe installations.



VP 415

POLYETHYLENE/PVC FILM TAPES

PE 333



POLYETHYLENE FILM
SERRATED OR STRAIGHT EDGE
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	7.0
ELONGATION (%)	80
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting when UV resistance is not required; Also for masking curved surfaces; Used for seaming underslab vapor barriers; Also used in the abatement, restoration and remodeling industries to hold poly-sheeting when building containments.



PE 444



POLYETHYLENE FILM
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	7.0
ELONGATION (%)	76
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting; Delivers residue-free removal for a variety of applications.



PE 555



POLYETHYLENE FILM
EXCELLENT TEARABILITY
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	92
THICKNESS (MILS)	9.0
ELONGATION (%)	94
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces during stucco application and painting; Can also be used for surface protection, color-coding, splicing and seaming on pipe-fitting covers; Delivers residue-free removal for a variety of applications.



SPECIALTY TAPES

PE 900



POLYETHYLENE FILM
SERRATED OR STRAIGHT EDGE
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	85
THICKNESS (MILS)	9.0
ELONGATION (%)	100
SERVICE TEMPERATURE RANGE (°F)	14 - 158
APPLICABLE STANDARDS*	42, 44

Used for marine shrink applications and vapor barrier seaming in boat storage and transportation applications; Also used for patching, repairing, bundling, wrapping and sealing applications across a variety of surfaces.



LS 300



UV-RESISTANT LINE SET
EASY TO UNWIND
ACRYLIC-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	2.85
ELONGATION (%)	180
SERVICE TEMPERATURE RANGE (°F)	-35 - 210
APPLICABLE STANDARDS*	-

For taping outdoor HVAC components.



COMPOSITE TAPES

AF 984CT



FOIL/SCRIM/KRAFT (FSK)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	34
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	7.4
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	29, 42

For sealing seams in scrim-reinforced duct insulation.



AF 990CT



ALL SERVICE JACKET (ASJ)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	30, 42

For use in cold and dual temperature systems to seal, seam and join scrim-reinforced pipe and duct insulation.



AF 995CT



ALL SERVICE JACKET+ (ASJ+)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	42

For permanently sealing butt joints on ductboard and pipe insulation wrapped with ASJ+ faced backing.



MB 100CT



WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS WITHOUT LINER (MILS)	6.9
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	42

For seaming and sealing VR-R plus insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



MB 200CT



WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	6.7
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	42

For medium duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



MB 300CT



WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	41
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	42

For heavy duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



* SEE PAGE 60 FOR APPLICABLE STANDARDS

DOUBLE- COATED TAPES

**We know you demand
versatility to get the job done.**

That's why we have engineered a comprehensive assortment of double-coated tapes, including paper, film, cloth and transfer adhesive options. Whether you're mounting, splicing, joining or laminating, these tapes have one thing in common: an unsurpassed level of **quality**.

Shurtape®
TRUE TO YOUR WORK™



DOUBLE-COATED PAPER TAPES

DF 65



GENERAL PURPOSE GRADE
FLAT PAPER
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
THICKNESS WITHOUT LINER (MILS)	5.0
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	21

For mounting, holding, splicing, tabbing and fastening applications that demand aggressive adhesion.



DT 200



PREMIUM PERFORMANCE GRADE
SOLVENT-BASED ACRYLIC ADHESIVE
NONWOVEN TISSUE

TENSILE (LBS/IN WIDTH)	6.3
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS WITHOUT LINER (MILS)	4.5
ELONGATION (%)	3.5
SERVICE TEMPERATURE RANGE (°F)	-20 - 212
APPLICABLE STANDARDS*	-

For high-speed splicing in the corrugated cardboard production process in temperatures up to 400 F; Can also be used as a mounting and laminating system for irregularly shaped metals, foams, foils and nameplates; For manual applications.

GG 200



GOLF GRIP
RUBBER-BASED ADHESIVE
CREPE PAPER

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS WITHOUT LINER (MILS)	6.5
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 150
APPLICABLE STANDARDS*	-

For factory and clubhouse golf grip installation; Can also be used for mounting, holding, splicing, tabbing and fastening a variety of substrates when an aggressive, double-sided tape is required.



DOUBLE-COATED FILM TAPES

FrogTape®
DS 154



PROFESSIONAL GRADE CONTAINMENT
EXCELLENT HOLD
FINE STRUCTURED CREPE
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS^)/60	
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES^)/27	
THICKNESS WITHOUT LINER (MILS)	8.5
ELONGATION (%)	9
SERVICE TEMPERATURE RANGE (°F)	32 - 120
APPLICABLE STANDARDS*	-

For holding poly-sheeting and other protective materials when creating high-performance containment systems; Use for restoration, abatement and remodeling tasks such as painting, cleaning, sanding, mold remediation, asbestos removal and more.



^LS=LINER SIDE; ^ES=EXPPOSED SIDE

DP 380



GENERAL PURPOSE GRADE
POLYESTER (PET) FILM
SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	14.3
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS WITHOUT LINER (MILS)	4.4
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	-20 - 257
APPLICABLE STANDARDS*	-

For mounting banners, light signs, window blinds, emblems and nameplates; Also used for long-term or permanent bonding and attachment applications, including POP displays and laminating materials.

DP 401



PROFESSIONAL GRADE
POLYESTER (PET) FILM
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	14
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS^)	124
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES^)	142
THICKNESS WITHOUT LINER (MILS)	4.7
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	32 - 150
APPLICABLE STANDARDS*	-

For polyethylene (PE) foam fabrication and lamination processes; Ideal for packaging applications that require cushioning, protection or stabilization of contents; Can also be used with die-cuts, gaskets, POP merchandising and shelf displays.

^LS=LINER SIDE; ^ES=EXPPOSED SIDE

DOUBLE-COATED FOAM TAPES

DF 164



GENERAL PURPOSE GRADE
POLYETHYLENE FOAM
RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	145
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	137
THICKNESS WITHOUT LINER (MILS)	66.1
ELONGATION (%)	339
SERVICE TEMPERATURE RANGE (°F)	0 - 180
APPLICABLE STANDARDS*	-

For bonding to most surfaces including low-surface energy materials like polyethylene and polypropylene, vibration reduction and sound damping.



TRANSFER ADHESIVE TAPES

TA 450



GENERAL PURPOSE GRADE
RESISTS HUMIDITY, MOST SOLVENTS
ACRYLIC-BASED ADHESIVE

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS WITHOUT LINER (MILS)	1.6
SERVICE TEMPERATURE RANGE (°F)	-22 - 302
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.



DISPENSER


SD 950



ADHESIVE TRANSFER GUN
PISTOL-GRIP
EASY TO LOAD

For use with reverse wound adhesive transfer tape to quickly and easily make almost any surface self-adhesive; For mounting, holding, joining and splicing paper, cardboard, plastics, wood, leather, glass and painted surfaces; Can also be used when gift wrapping; For use with 0.75 in maximum width rolls.

RECOMMENDED PRODUCTS
TG 356

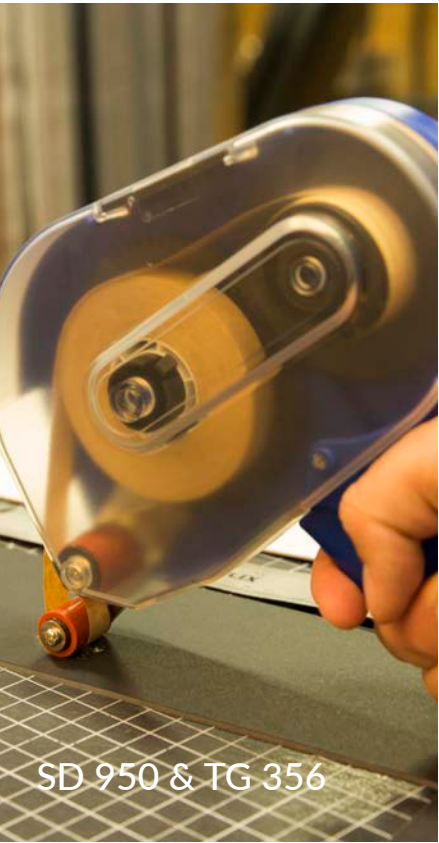

SD 950 & TG 356

TG 356



PREMIUM PERFORMANCE GRADE
RESISTS HUMIDITY, MOST SOLVENTS
ACRYLIC-BASED ADHESIVE

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS WITHOUT LINER (MILS)	2.0
SERVICE TEMPERATURE RANGE (°F)	-60 - 250
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.; Use with an adhesive transfer gun to make almost any surface self-adhesive. Reverse wound on a 1in I.D. core.



* SEE PAGE 60 FOR APPLICABLE STANDARDS

PRO TAPES®

**When performance matters,
experience makes
the difference.**

From bonding and mounting to
sealing and surface protection,
Pro Tapes delivers the reliable
performance and quality
professionals trust. Backed by
specialized converting capabilities,

Pro Tapes is committed to
providing the right solution that
**exceeds expectations for
every application.**



PRO TAPES® TAPES



**Pro Gaff®
P- 628**

PROFESSIONAL GRADE GAFFER'S
MATTE-FINISH BACKING
HIGH TENSILE AND HOLDING POWER
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	11.0
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

Professional grade, matte-finish gaffer's tape for general purpose protection, color-coding, labeling and marking applications; Also available in Electric Blue, Purple, Tan, Teal, Olive Drab, Burgundy and Chroma Green.



P- 665

PROFESSIONAL GRADE GAFFER'S
MATTE-FINISH BACKING
HIGH ADHESION AND TACK
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.5
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	17

For demanding applications that require clean removal in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.

*Available through Pro Tapes, a Shurtape Technologies Company. Contact your Shurtape Sales Representative for more information.




P- 660

PROFESSIONAL GRADE GAFFER'S
MATTE-FINISH BACKING
HIGH TENSILE AND HOLDING POWER
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For bundling or securing wires, cables and props in the audio/visual, television, photography, theatrical and motion picture industries; Also used for color-coding, labeling, marking and book-binding applications; Will fluoresce under black light.

*Available through Pro Tapes, a Shurtape Technologies Company. Contact your Shurtape Sales Representative for more information.

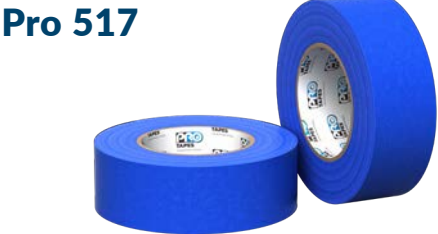

Pro 517

PREMIUM FLATBACK
PAPER TAPE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	73
THICKNESS (MILS)	9.0
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

Premium flatback tape used for splices on a vast variety of materials; Ideal for sealing beams on cardboard to protect flooring materials.

*Available through Pro Tapes, a Shurtape Technologies Company. Contact your Shurtape Sales Representative for more information.



P- 672

PREMIUM GRADE GAFFER'S
LIGHT DUTY
MATTE-FINISH BACKING
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	77
THICKNESS (MILS)	12.0
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	17, 36

For sealing containers and protection from welding splatter; Can also be used for sealing rooms, abrasion protection, general holding, bundling and temporary repair applications.

*Available through Pro Tapes, a Shurtape Technologies Company. Contact your Shurtape Sales Representative for more information.



**Pro Elephant
Skin**

TEMPORARY
SURFACE PROTECTION
PAPER TAPE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32.5
THICKNESS (MILS)	14.08
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

Premium flatback paper tape used for temporary protection of finished surfaces during manufacturing, assembly or finishing operations; Also designed for surface protection of equipment and parts during maintenance, storage or transport.

*Available through Pro Tapes, a Shurtape Technologies Company. Contact your Shurtape Sales Representative for more information.




APPLICABLE STANDARDS

1	AMS-T-21595	17	CID A-A-1586A	33	FSI 15/SDI 30
2	ANSI No. 45.2.2	18	CID A-A-1684C	34	FSI 20/SDI 40
3	ASME NQA-1	19	CID A-A-1689B, Type I, Class 2	35	FSI 25/SDI 50
4	ASTM D 1974/D 1974M-16	20	CID A-A-1689B, Type II	36	MIL-STD-2041D
5	ASTM D 4236	21	CID A-A-180C, Type II, Grade B	37	NRC Guide 1.38
6	ASTM D 4325	22	CSA 22.2	38	Pressure Classes SMACNA 1/2, 1, 2, 3, 4 & 6
7	ASTM 4388	23	FDA Indirect Contact CFR 21, 174.5	39	Seal Classes A, B, C
8	ASTM D 5330, Type II	24	FDA Indirect Contact CFR 21, 175.105	40	UL 181A-P
9	ASTM D 5479-17, Type I	25	FDA Indirect Contact CFR 21, 176.170	41	UL 181B-FX
10	ASTM D 5486M-12, Type I, Class 2	26	FDA Indirect Contact CFR 21, 176.180	42	Tested in accordance with UL 723
11	ASTM D 5486M-12, Type II, Class 2	27	FDA Indirect Contact CFR 21, 177.1630	43	UL Listed
12	ASTM D 5486M-12, Type III	28	FSI 0/SDI 0	44	ASTM E84
13	ASTM D 5486M-12, Type IV	29	FSI 5/SDI 0	45	ASTM D 5486M-20, TYPE IV
14	ASTM D 5486M-12, Type V	30	FSI 5/SDI 10	46	AAMA 711-22
15	ASTM D 6123/D 6123M-97 (2012), Type I	31	FSI 5/SDI 25		
16	ASTM D 6123/D 6123M-97 (2012), Type II	32	FSI 15/SDI 25		

Warranty Information


For warranty information, scan the QR code below or visit ShurtapeTech.com/about/warranty.



All trademarks listed are the property of Shurtape Technologies, LLC, unless otherwise noted. Information included in this catalog is true at time of printing.

Global Footprint

We are proud to be a global leader in tape manufacturing, combining scale, quality and value to serve a worldwide audience, with locations in:

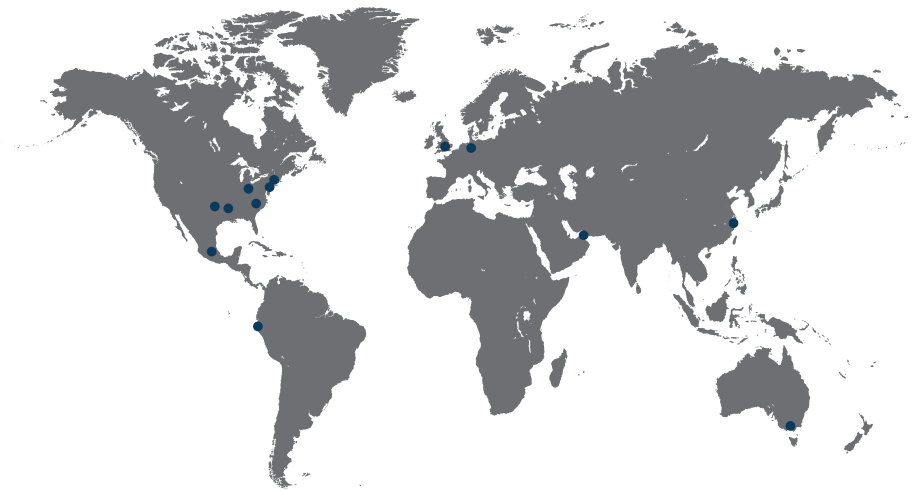

United Kingdom | Germany | Mexico | Peru | Denmark
Australasia | United Arab Emirates | China

Want to learn more about our company, locations and brands?
Visit us online at ShurtapeTech.com.



PRODUCT INDEX

Shurtape® Brand

AF 099	46	HP 260	16
AF 914CT	46	HP 300®	14
AF 975CT	46	HP 400®	14
AF 984CT	51	HP 460	16
AF 990CT	51	HP 500®	14
AF 995CT	51	HP 535	15
AP 15	21	HP 560	16
AP 101®	17	HP 800	14
AP 180®	17	HP Custom Print	16
AP 201®	17	LS 300	50
AP 301®	17	M-1	31
AP 401®	17	MB 100CT	51
BT 100	49	MB 200CT	51
CF 33	6	MB 300CT	51
COL 00	6	MJ 100	36
CP 102	6	PC 6	35
CP 105	7	PC 7	34
CP 106	7	PC 8	34
CP 107	6	PC 622	36
CP 150	5	PC 624	37
CP 27®	5	PC 625	37
CP 66®	6	PC 667	36
CP 83	7	PC 857	36
CP 327	11	PE 333	50
CP 631	7	PE 444	50
CP 743	11	PE 555	50
CP 901	8	PE 900	50
CR 100	22	PP 802	20
CR 400	22	PP 808	21
CT 109	21	PP 810	20
DC 181	47	PP 815	20
DF 65	54	PS 748	19
DF 164	55	PW 100	49
DP 380	54	rAP 201	22
DP 401	54	rHP 100	22
DT 200	54	rHP 235	22
E-1	31	rHP 255	22
EV 57B	48	SD 930	31
EV 57C	48	SD 931	31
EV 77B	48	SD 932	30
EV 77C	48	SD 934	30
FE-2	28	SD 935	30
FE-3	28	SD 936	30
FP 96	10	SD 937	31
FP 97	10	SD 950	55
FP 115	10	SD 955	31
FP 202	10	SD 999	31
FP 227	10	SF 682	36
FT Series	30	SF 685	47
GG 200	54	SF 686	47
GP 100	18	SP 7000	25
GS 490	19	SP 8000	25
GS 500	19	TA 450	55
GS 501	19	TG 356	55
GS 521	19	VF 719	21
HP 100®	14	VP 410	49
HP 200®	14	VP 415	49
HP 232®	15	WP 100	18
HP 235	15	WP 200	18
HP 240	16	WP 300	18
		WP 400	18
		WP Custom Print	18

FrogTape® Brand

FrogTape® 225 Gold	8
FrogTape® 250 Light Blue	8
FrogTape® 325 Pink	8
FrogTape® CF 120	4
FrogTape® CF 160	4
FrogTape® CF 180	4
FrogTape® CP 130	4
FrogTape® CP 199	4
FrogTape® CP 399	4
FrogTape® DS 154	54
FrogTape® FLC 280	8
FrogTape® FLS 325	8
FrogTape™ Pro Grade Deck & Joist Flashing Tape	42
FrogTape™ Pro Grade Flashing & Waterproofing Tape	42
FrogTape™ Pro Grade Flashing Tape	42

Duck Pro® Brand

Duck Pro® DF 545	37
Duck Pro® PC 609	35
Duck Pro® PC 618	35
Duck Pro® PC 619	34
Duck Pro® PC 657®	35
Duck Pro® PC 721	35
Duck Pro® PC 9	34

T-Rex® Brand

T-Rex® Brute Force®	38
T-Rex® Clear Repair Tape	38
T-Rex® Double-Sided Super Glue Tape	38
T-Rex® Duct Tape	38
T-Rex® Extreme Strength Waterproof & Repair Tape	38
T-Rex® Ferociously Strong Waterproof & Repair Tape	38

Pro Tapes®

Pro 517	58
Pro Elephant Skin	58
Pro Gaff® P- 628	58
Pro Gaff® P- 660	58
Pro Gaff® P- 665	58
Pro Gaff® P- 672	58

SHURTAPE TECHNOLOGIES, LLC
PO BOX 1530
HICKORY, NC 28603-1530 USA

SHURTAPE.COM
1.888.442.TAPE
CUSTSERVICE@SHURTAPE.COM

ISO 9001-CERTIFIED QUALITY SYSTEM

Shurtape
TECHNOLOGIES

©2026 SHURTAPE TECHNOLOGIES, LLC
FORM #CAT-COMP-08/2026
PRINTED IN USA ON RECYCLED PAPER

